

Technical Data Sheet

CODE 11910

VORT MICRO T




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	1,25
Insulation class	II°	Max airflow (l/s)	25
Max absorbed current (A)	0,10	Max airflow (m³/h)	90
Max absorbed power (W)	20	Max pressure (mmH2O)	11,5
Nominal diameter (mm)	100	Max pressure (Pa)	113
Ø Discharge hole (mm)	97	RPM	1760
Voltage (V)	220-240	Sound pressure Lp [dB (A)] at 3 m	47

DIMENSIONS

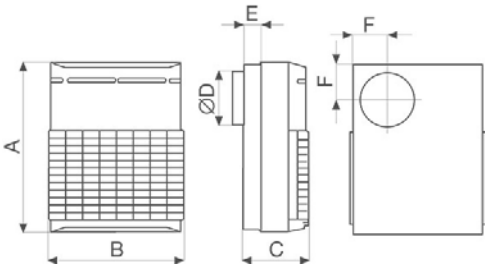

Size A (mm)	260
Size B (mm)	185
Size C (mm)	117
Size D (mm)	Ø 97
Size E (mm)	25
Size F (mm)	65

Technical Data Sheet

CODE 11910

VORT MICRO T



DESCRIPTION

- Material: UV resistant plastic.
- Nominal diameter: 100 mm
- Motor with starting capacitor, equipped with thermal protection.
- Maximum air flow: 90 m3/h
- Protection grid and mesh multi-layer aluminum filter on the front of the product, easily removable and washable.
- Butterfly clasp to prevent back flow when unit is turned off.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- Vortice speed controller.

CURVES

□

ACCESSORIES