

Technical Data Sheet

CODE 11630

M 10/4" T



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	0,44
Insulation class	II°	Max airflow (l/s)	23,6
IP	X0	Max airflow (m³/h)	85
Max absorbed current (A)	0,09	Max pressure (mmH2O)	4,2
Max absorbed power (W)	16	Max pressure (Pa)	41,2
Nominal diameter (mm)	100	RPM	2430
Ø Discharge hole (mm)	98	Sound power Lw [dB(A)]	51
Voltage (V)	220-240	Sound pressure Lp [dB (A)] at 3 m	39

DIMENSIONS

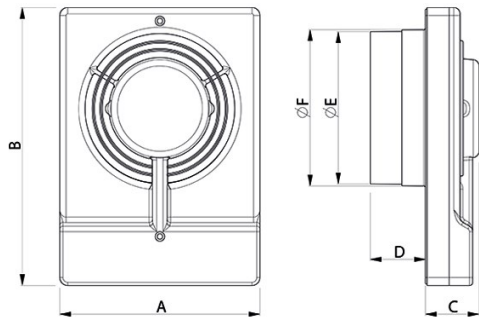

Size A (mm)	127
Size B (mm)	176
Size C (mm)	39
Size D (mm)	35
Size E (mm)	97
Size F (mm)	99

Technical Data Sheet

CODE 11630



M 10/4" T



DESCRIPTION

- Suitable for use in bathrooms, toilets, kitchens and small rooms.
- Fitted with an electronic timer which can be adjusted to overrun from 3 to 20 minutes.
- High air capacity and low noise levels due to wing shaped blades.
- Motor with thermal overload protection.
- Wear resistant ABS casing for mechanical strength.
- Quick and easy installation and maintenance (all components accessible and easily removed).
- Can be used with a maximum of 50 cm ducting.

CURVES

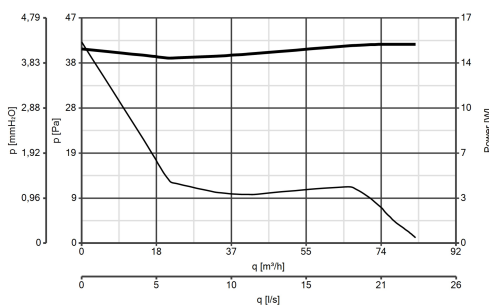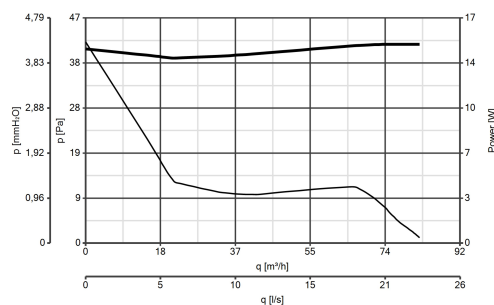

ACCESSORIES



C 1.5
(COMANDO EL.
1.5 A)
Code 12966



SCNRB
SCAT.COM.NON
REV.INCASSO
Code 12971



DEVIATORE DI
FLUSSO M 10/4
Code 22310



KIT SCB
(TRASF.E.C.)
Code 22481